



PLAN VIEW

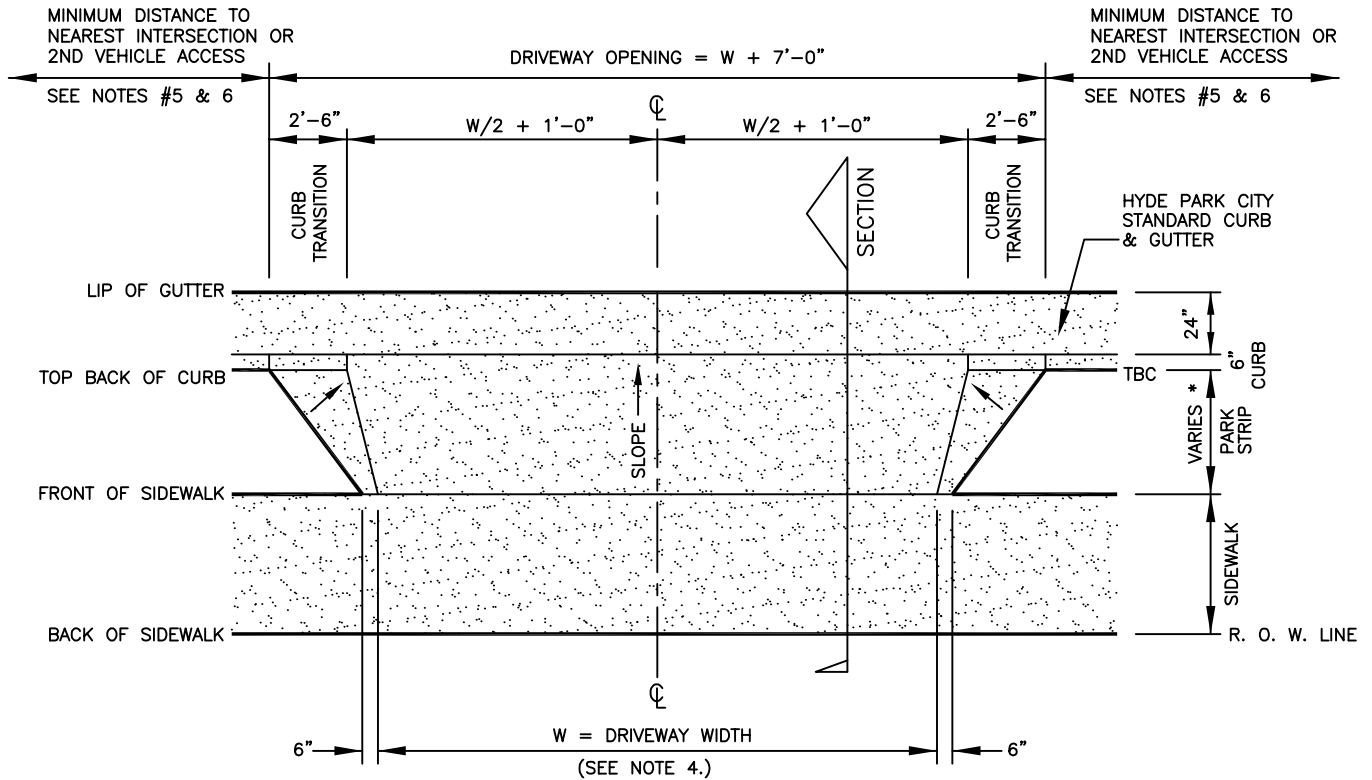

NOTES:

1. SIDEWALK SCORE MARKS 1/2" DEEP EVERY 5 FEET.
2. ALL HORIZONTAL SURFACES TO BE STEEL TROWELED FOLLOWED BY A LIGHT BROOM FINISH. * SEE HYDE PARK CITY'S STANDARD STREET SECTIONS
3. EXISTING CURB & GUTTER MUST BE SAW CUT & BEVELED TO MATCH THIS DETAIL WITH NO BREAKS OR CRACKS. OTHERWISE, THE ENTIRE SECTION MUST BE REPLACED.
4. IN COMMERCIAL ZONES, DRIVEWAY WIDTH SHALL NOT EXCEED 50 FEET. IN RESIDENTIAL ZONES, DRIVEWAY WIDTH SHALL NOT EXCEED 25 FEET.
5. NO DRIVEWAY OR CURB CUT SHALL BE CLOSER THAN 30 FEET TO A STREET INTERSECTION OR TO A SECOND DRIVEWAY OR CURB CUT. SEE DRAWING No. C-5B
6. NO LOT SHALL HAVE MORE THAN TWO VEHICULAR ACCESS POINTS OR CURB CUTS.

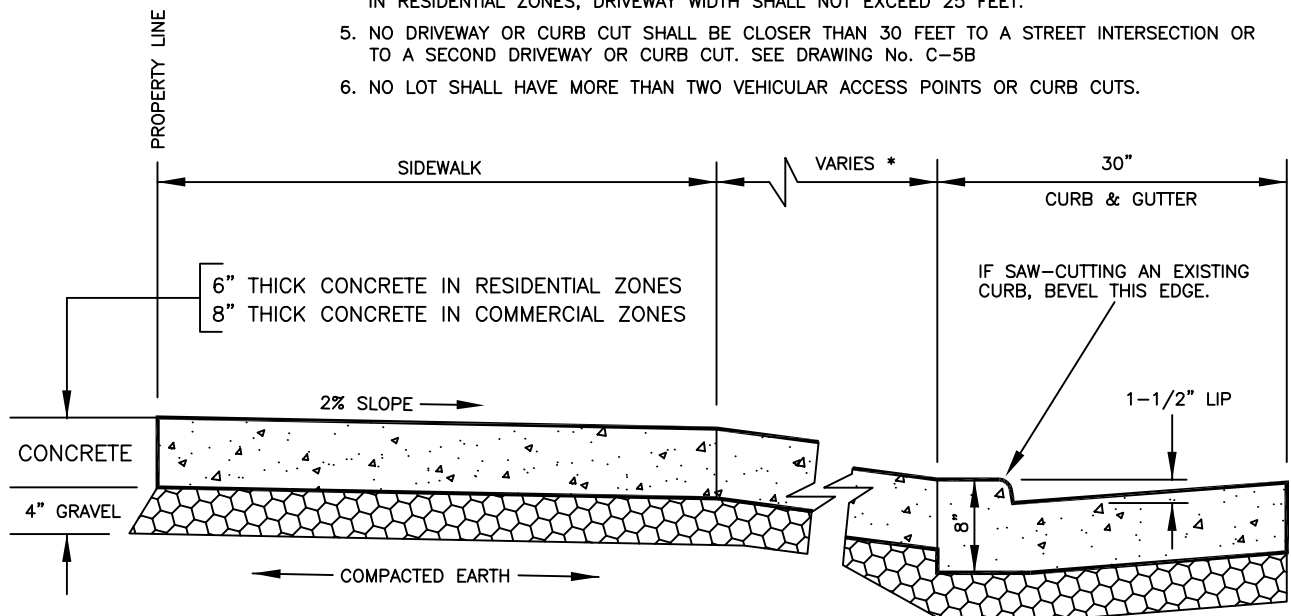

CROSS SECTION