




PLAN VIEW OF STREET

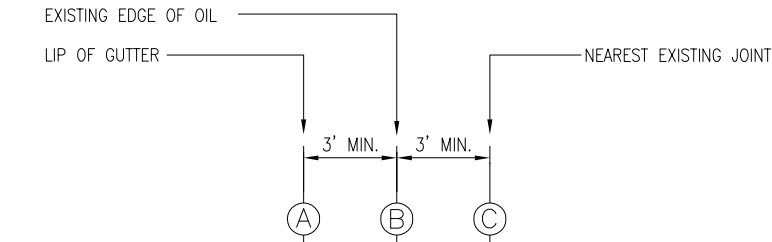

TOP BACK OF NEW CURB (TBC)

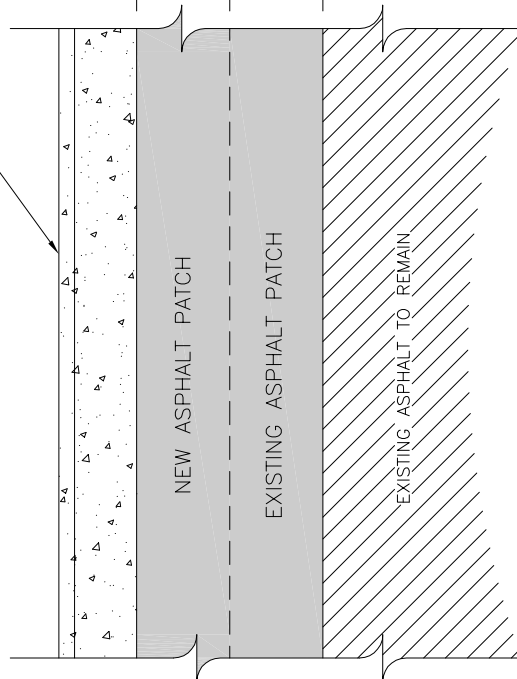

EDGE OF NEW 2 FT. WIDE GRAVEL SHOULDER

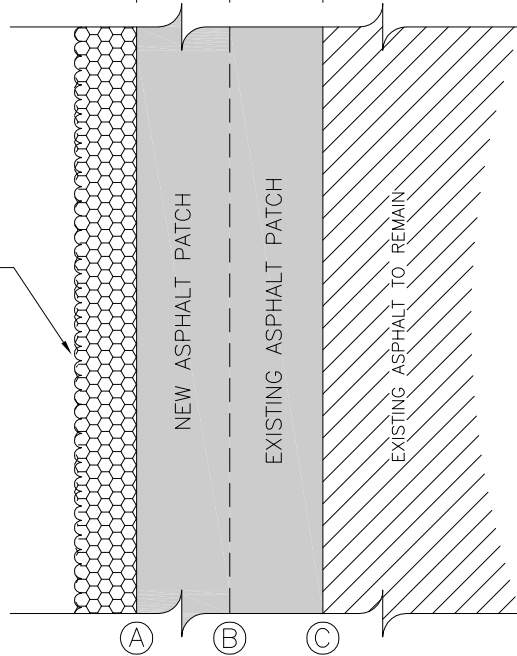

Streets where new curb & gutter is required

IF THE EXISTING ASPHALT PATCH IS LESS THAN 3 FEET WIDE AT ITS NARROWEST POINT, THEN INSTALL NEW ASPHALT BETWEEN LINES (A) AND (C).

IF THE EXISTING ASPHALT PATCH IS GREATER THAN 3 FEET WIDE AT ITS NARROWEST POINT, THEN INSTALL NEW ASPHALT BETWEEN LINES (A) AND (B).

WHERE NEW ASPHALT ADJOINS EXISTING ASPHALT, PRIME AND SEAL THE EDGE OF THE SAW CUT WITH TACK OIL.

Streets where curb & gutter is NOT required